



# 2" & 4" FLUSH JOINT MONITORING

**PIPE** Page 76  
5 - 20 - 11

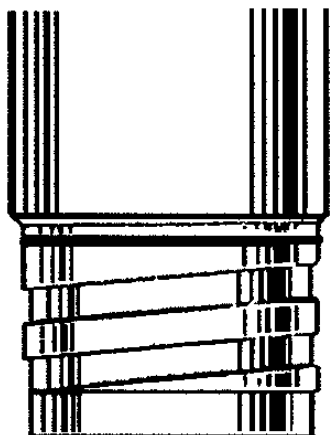

## ENVIRONMENTAL WELL CONSTRUCTION

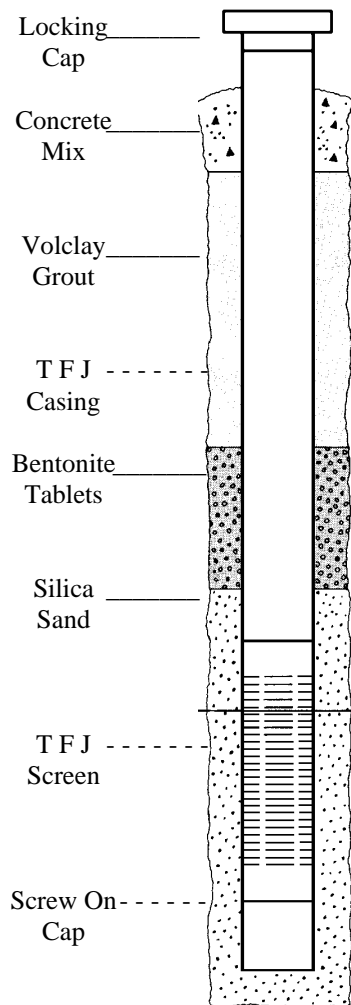

**DEAN BENNETT SUPPLY CO.**  
Toll Free : 800 - 621 - 4291  
PRICES ARE YOUR NET COSTS

## ENVIRONMENTAL PIPE & SCREEN

### 2" THREADED FLUSH JOINT P V C PIPE

2" Schedule 40 white P V C pipe with ASTM F-481A standard 2 - pitch threaded flush joint ends. Each male end has a Buna N O-ring to ensure a water tight seal. Each length is individually cleaned and bagged. Packaged in master cartons of 10 lengths per carton.

O.D. of pipe 2.375" I.D. of pipe 2.067"  
Wall thickness .154" Weight per foot .70 lbs

**\$ 24.50 lgth 2" x 10'** lengths of Solid Riser / Casing 2X10S40TFJSOL  
**\$ 17.50 lgth 2" x 5'** lengths of Solid Riser / Casing 2X5S40TFJSOL  
**\$ 13.75 lgth 2" x 2'** lengths of Solid Riser / Casing 2X2S40TFJSOL

**Mill Slotting Specs:** 3 rows of slots 1/4" spacing between slots  
.010" 10 Slot = 1.77 sq. in. of open area per linear foot of screen  
.020" 20 Slot = 3.55 sq. in. of open area per linear foot of screen

**\$ 34.00 lgth 2" x 10'** lengths of 20 slot Screen 2X10S40TFJ020  
**\$ 34.00 lgth 2" x 10'** lengths of 10 slot Screen 2X10S40TFJ010  
**\$ 27.00 lgth 2" x 5'** lengths of 20 slot Screen 2X5S40TFJ020  
**\$ 27.00 lgth 2" x 5'** lengths of 10 slot Screen 2X5S40TFJ010

### 4" THREADED FLUSH JOINT P V C PIPE

4" Schedule 40 white P V C pipe with ASTM F-481A standard 2 - pitch threaded flush joint ends. Each male end has a Buna N O-ring to ensure a water tight seal. Each length is individually cleaned and bagged. Packaged in master cartons of 3 lengths per carton.

O.D. of pipe 4.500" I.D. of pipe 4.026"  
Wall thickness .237" Weight per foot 2.07 lbs

**\$ 64.00 lgth 4" x 10'** lengths of Solid Riser / Casing 4X10S40TFJSOL  
**\$ 46.25 lgth 4" x 5'** lengths of Solid Riser / Casing 4X5S40TFJSOL  
**\$ 31.50 lgth 4" x 2'** lengths of Solid Riser / Casing 4X2S40TFJSOL

**Mill Slotting Specs:** 4 rows of slots 1/4" spacing between slots  
.010" 10 Slot = 3.44 sq. in. of open area per linear foot of screen  
.020" 20 Slot = 6.88 sq. in. of open area per linear foot of screen

**\$ 84.00 lgth 4" x 10'** lengths of 20 slot Screen 4X10S40TFJ020  
**\$ 84.00 lgth 4" x 10'** lengths of 10 slot Screen 4X10S40TFJ010  
**\$ 59.00 lgth 4" x 5'** lengths of 20 slot Screen 4X5S40TFJ020  
**\$ 59.00 lgth 4" x 5'** lengths of 10 slot Screen 4X5S40TFJ010  
**\$ 55.00 lgth 4" x 2' Hi-Flo 1/8" spacing 20 slot Screen SHROUDSTRAINER**

## ABOVE LENGTHS & SLOT SIZES ARE DENVER STOCK ITEMS

Any special custom slot size, 1/8" Hi-Flow slot spacing, heavier Sch 80 material, or Verta-Slot vertical slotting pattern are all available on a special order basis out of our factory. Allow for incoming freight charges and an extra week of lead time.