

STAINLESS STEEL WELL SCREENS


3 - 25 - 08

DEAN BENNETT SUPPLY CO

Toll Free : 800 - 621 - 4291

Page 37a


Type 304 Stainless Steel Rod Based Continuous Slot Wire Wrap Well Screens & Drive Points

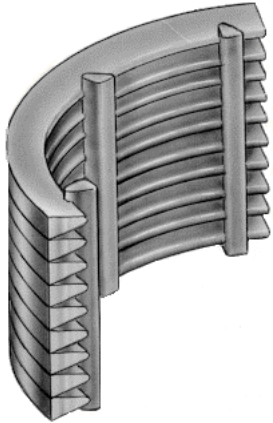

Johnson is the leading manufacturer of wire wrap well screens. Vertical stainless steel support rods are wrapped with v-wire (wedge tapered) stainless steel welded wire that produces a continuous slot opening around the entire surface area of the screen. Here in Denver, we stock this screen in a 10 slot (ie 10/1000 inch opening) construction. This screen yields approximately 13.3 square inches of open area per linear foot of screen. These screens and drive points are made entirely of Type 304 stainless steel (even including the drive point head itself) to produce an extremely corrosion resistant product.

The screens are threaded with standard iron pipe thread MIPT x MIPT. Using both 3' screens and 5' screens along with our 2" stainless steel pipe couplings, you can come up with an almost unlimited choice of screen setting lengths. In addition, our threaded flush joint change-over will allow you to transition into ASTM F-480 threaded flush joint PVC plastic solid riser pipe for monitoring applications.

The v-wire or wedge wire tapered opening becomes progressively wider toward the interior of the well screen. This produces a non plugging opening (unlike mesh construction) that has only two contact points to retain sand particles, thus increasing efficiency and lowering entrance velocity.

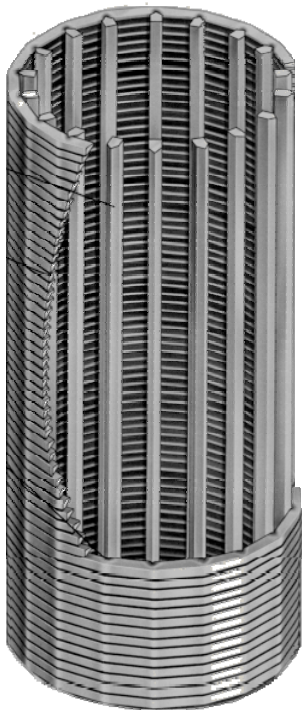

Type 304 Stainless Steel Rod Based Continuous Slot Wire Wrap Well Screen Drive Points & Accessories

- \$ 237.00 **2" x 36" Johnson All Stainless Steel Screen / Extension 10 Slot (10/1000") Mipt x Mipt threaded ends Type 304 2X36SSEXTENSION**
- \$ 325.00 **2" x 60" Johnson All Stainless Steel Screen / Extension 10 Slot (10/1000") Mipt x Mipt threaded ends Type 304 2X60SSEXTENSION**
- \$ 325.00 **2" x 36" Johnson All Stainless Steel Complete Drive Point 10 Slot Mipt thread x Type #304 stainless steel drive point suitable for driven wells. 2X36SSDRIVEPOINT**
- \$ 19.95 **2" Stainless Steel Pipe Couplings Fipt x Fipt 20SSCOUP**
- \$ 19.00 **2" PVC Threaded Flush Joint Change-Over 2" Mipt x 2" Female flush joint thread in Sch 40 PVC plastic 20MIPx20FJ**

